


Built-in tap

replacing the diverter cartridge*

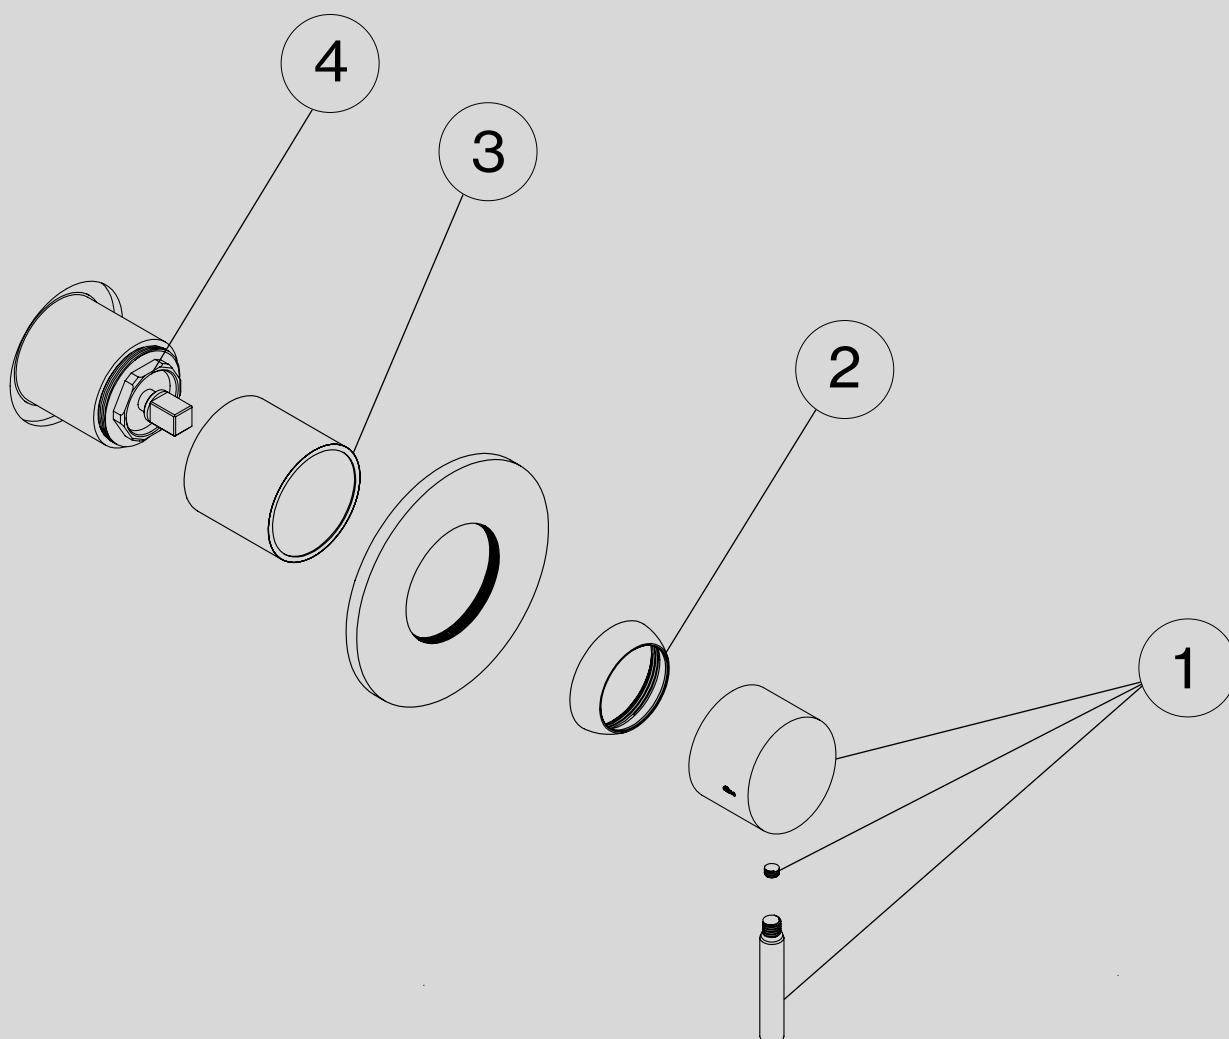

Turn off the water supply!

1. Unscrew the pin, loosen and remove the grub screw (2 mm hex key), and remove the handle
2. Loosen the design cap
3. Remove the cylinder and the rosette
4. Loosen the nut securing the cartridge

*Diverter cartridge, item number: QR3200