


# Qtoo collection

**Product** Flexbox with premix solenoid valve

**Tender text** QTOO collection, Flexbox with premix solenoid valve for sensor range.



**Product specification** Temperature control  
Comfort time out 2 sec.  
Security time out 30 sec.  
Automatic rinse cycle (deactivated)  
Max. work pressure 8 bar  
[1 year warranty for electronic parts](#)  
Minimum requirement of 0,5 bar dynamic pressure  
Without Thermostat function

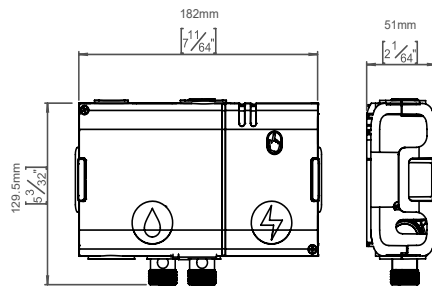

**Available finishes**

**Spare parts/  
accessories** QST1150 - Single hole sensor tap  
QST3190 - Sensor tap for wall  
QST3290 - Sensor tap for wall  
QSP01 - Power supply

**Mounting** <https://dline.com/mounting-instructions/>

#### Product care

d line products are produced in the highest quality marine grade AISI 316 stainless steel. To sustain the unique d line finish please follow the below instructions:

- Wash down the surfaces using soapy water or mild detergent
  - Always thoroughly rinse off with clean water
  - To complete the cleaning procedure dry/polish the surface with a soft dry cloth
- Please do not use scouring powder, steel wool, chloride based detergents or other aggressive cleaning products as these may damage the surface.
- If spots or corrosion appear on the surface it is not due to the stainless steel quality, but to impurities in the environment, aggressive conditions or improper or insufficient cleaning.