


Universal 6V Power Supply

QTOO collection

Product Universal 6V Power Supply

Tender text Qtoo collection, Universal 6V Power Supply for 240W

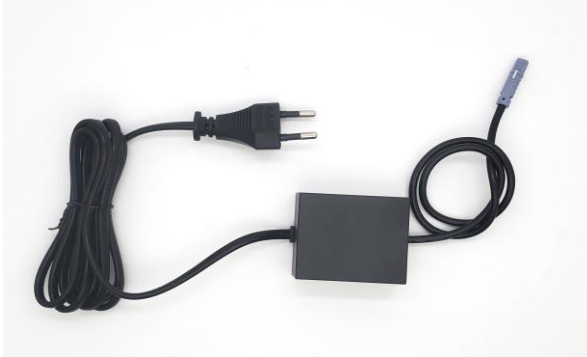

Product specification Storage temperature -25 to +70°C
Operating humidity 5 to 95% RH
Operating temperature 0 to 60°C*
Input voltage 100 to 240 VAC
Input frequency 50 to 60Hz
Output voltage 6V to 6.8V
Output power 6W
Output capacity 4400 µF
Ripple voltage ≤100mV peak to peak
Surge protection 2.5kV
Protection CLASS II / IP67
Standards CE, CQC, CB, UL, DOE VI, ROHS, REACH, EN15091, C/J/T194
Length of cable from the plug to the transformer: 1500mm
Length of cable from the transformer to the tap: 80mm

Available finishes

**Spare parts/
accessories**

Mounting <https://dline.com/mounting-instructions/>

Product care

d line products are produced in the highest quality marine grade AISI 316 stainless steel. To sustain the unique d line finish please follow the below instructions:

- Wash down the surfaces using soapy water or mild detergent
- Always thoroughly rinse off with clean water
- To complete the cleaning procedure dry/polish the surface with a soft dry cloth

Please do not use scouring powder, steel wool, chloride based detergents or other aggressive cleaning products as these may damage the surface.

If spots or corrosion appear on the surface it is not due to the stainless steel quality, but to impurities in the environment, aggressive conditions or improper or insufficient cleaning.