


Installation note

built-in box



part of **dline**

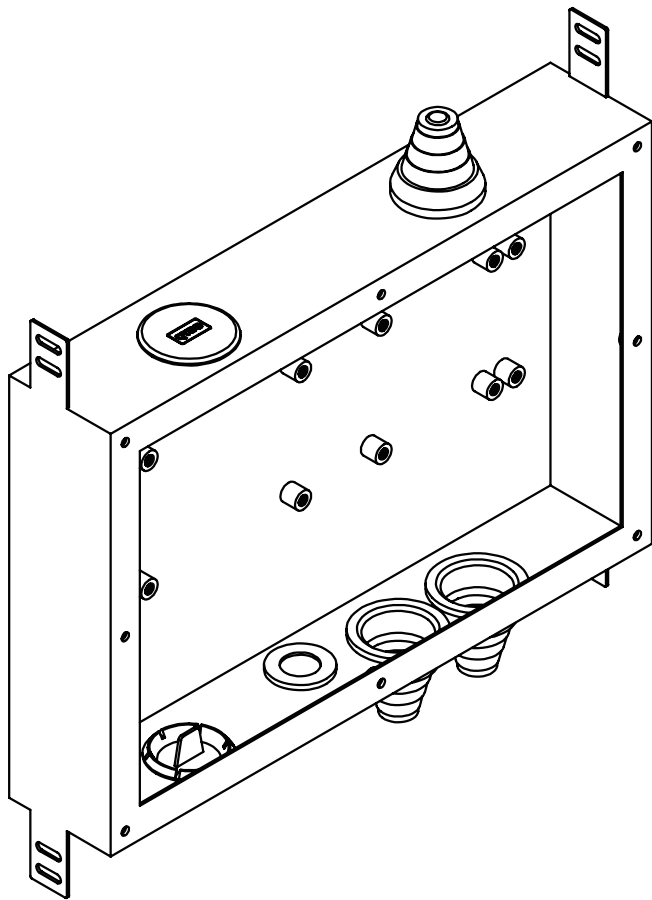

Contents

Before installation		Page 2
Included components		Page 3
Dimensions		Page 4
Installation		Page 5
Service and maintenance		Page 8
Contact		Page 8



WARNING:
Installation must be carried out by a professional in accordance with this manual and local installation regulations

Installation note


built-in box








part of **dline**

PROVIDED EQUIPMENT

- Box and accessories (see next page for details)

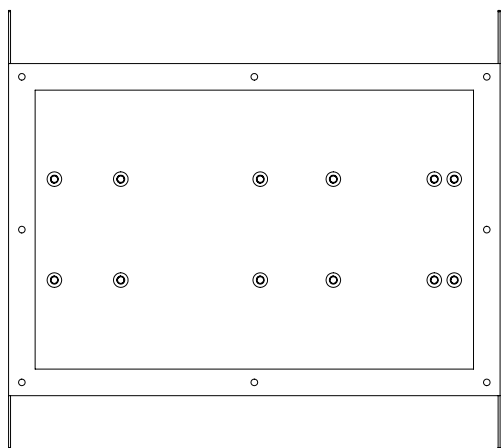

OTHER REQUIRED EQUIPMENT

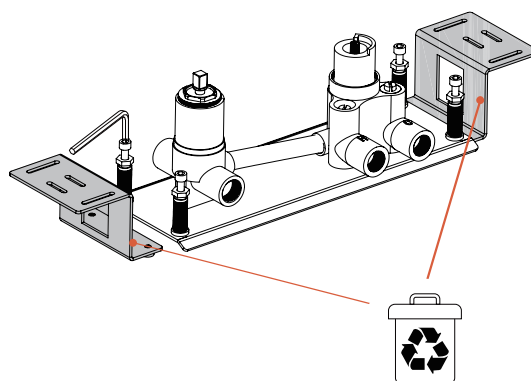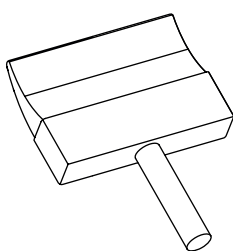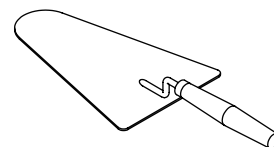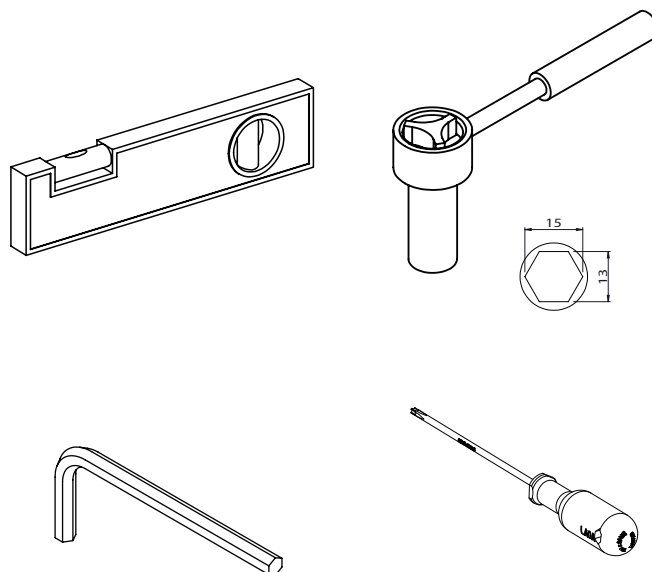

Before installation

This manual covers installation of box for leak proof installation of d line's built in products with below article numbers:

QS3100 Mixer (with cover lid QA4010)

QS3200 Mixer and diverter (with cover lid QA4020)

QS3300 Thermostatic Mixer and diverter (with cover lid QA4025)

QT3100 Mixer and spout (with cover lid QA4030)

This manual is based on example of QS3300.

Installation note


built-in box

QTOO


part of **dline**

Included components


- A Built-in box x1
- B Sealing cover for hose x4
- C Sealing cover for drain pipe x1
- D Sealing plug x3
- E Plastic clamp x1
- F Sealing foam x 1
- G Installation screw for cover lid x8
- H Cover lid for QS3300 x1
- I Cover lid for QS3100 x1
- J Cover lid for QS3200 x1
- K Cover lid for QT3100 x1

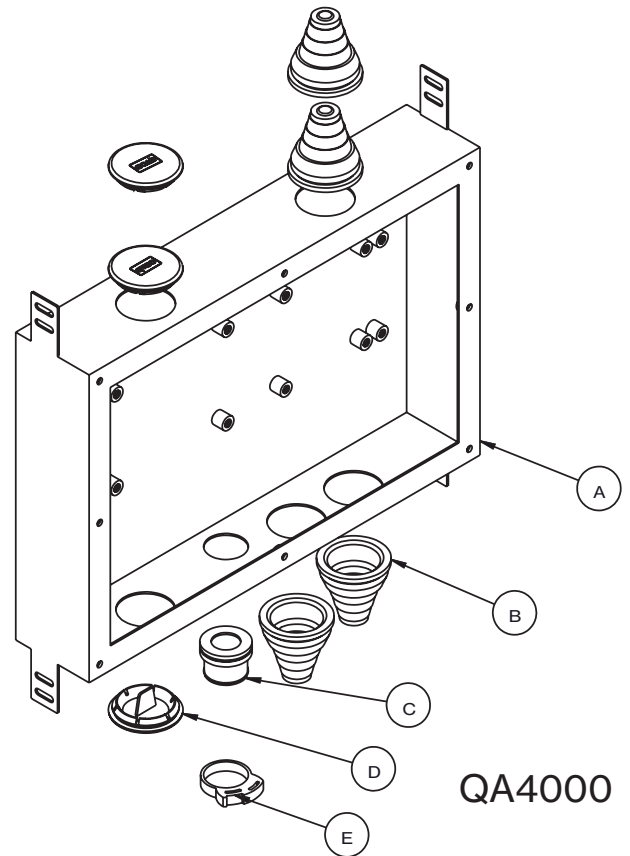


QA4000

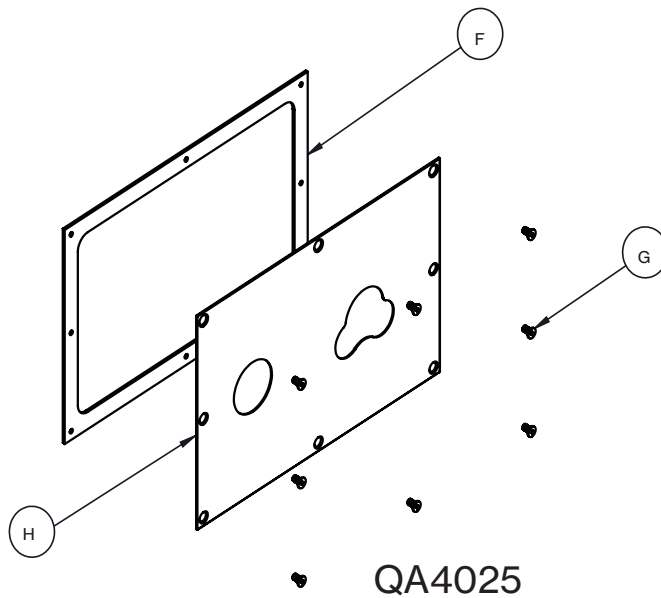


QA4025

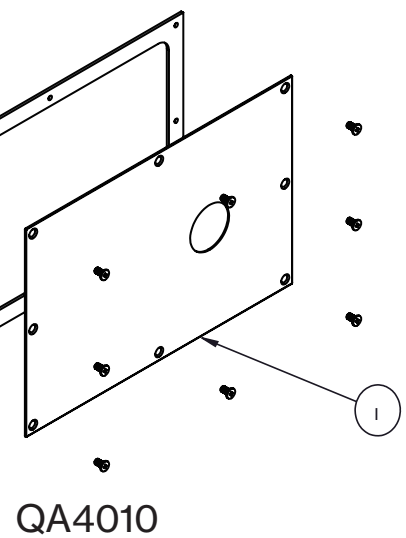

QA4010

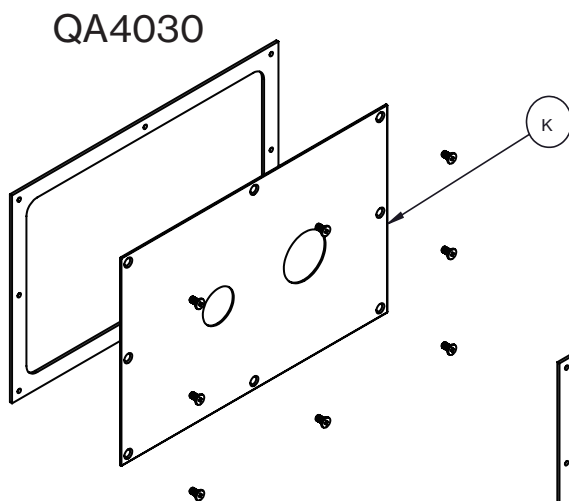

QA4030


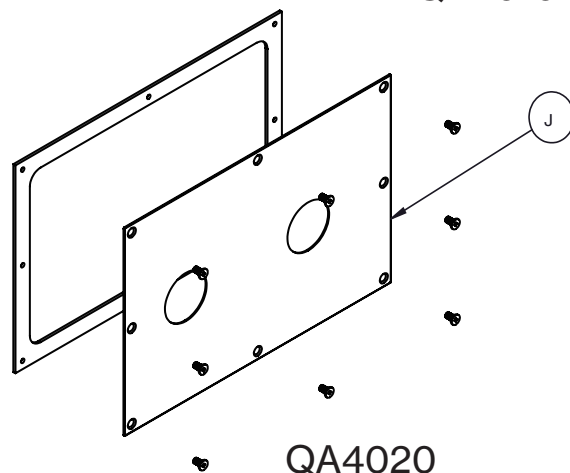


QA4020


Installation note

built-in box

Dimensions

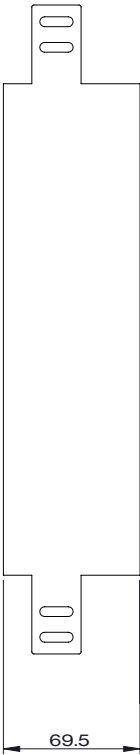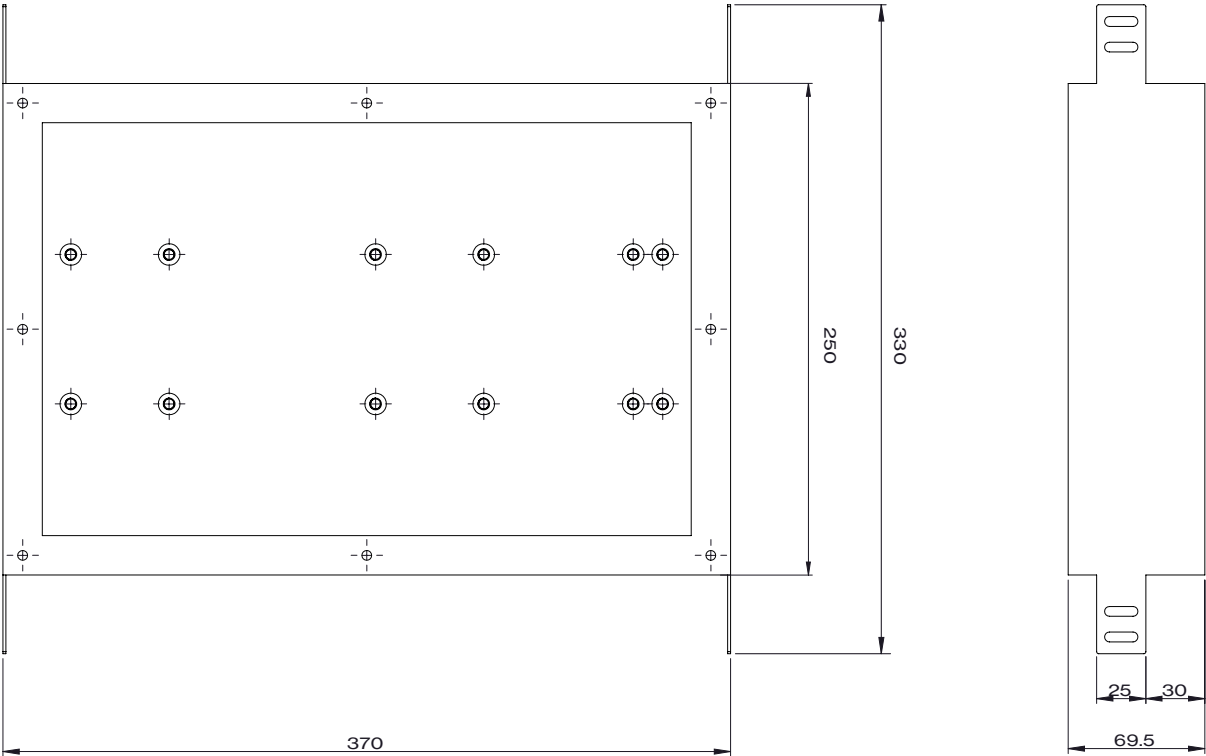

without cover lid

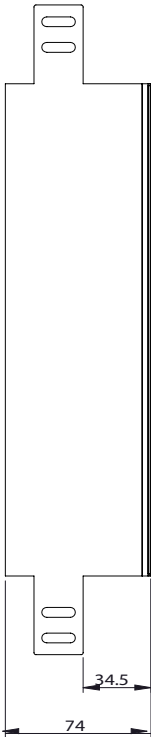

with cover lid


Installation note built-in box

QTOO


part of **dline**

Installation


STEP 1 Install the box in between the studs.

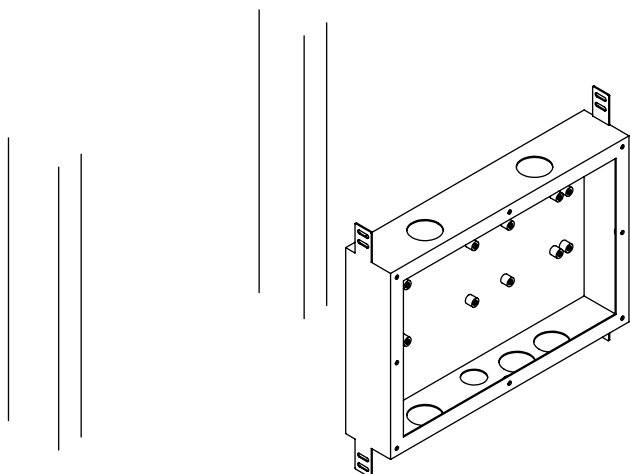


STEP 2 Install the box inside the wall and make the flaps on each corner against the wall to enable the installation of the box

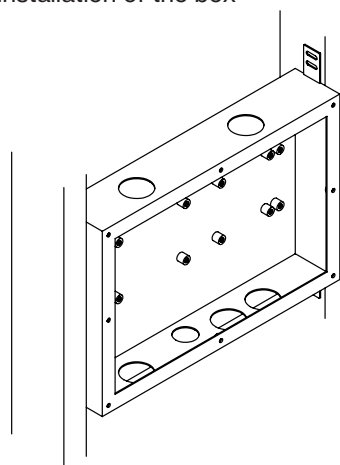


STEP 3 Use a spirit level to ensure that the box is level horizontally and vertically.

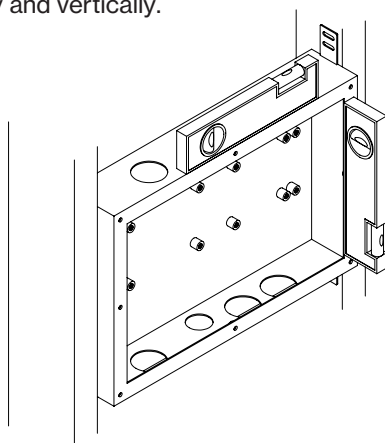


STEP 4 Measure the depth of the box to ensure that the front of the box is installed in line with the front of the wall panel.

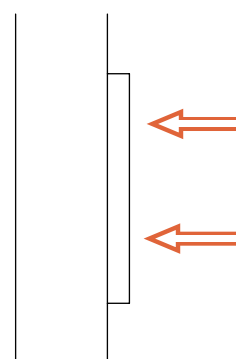

STEP 5 Use screws to install the box into the studs.

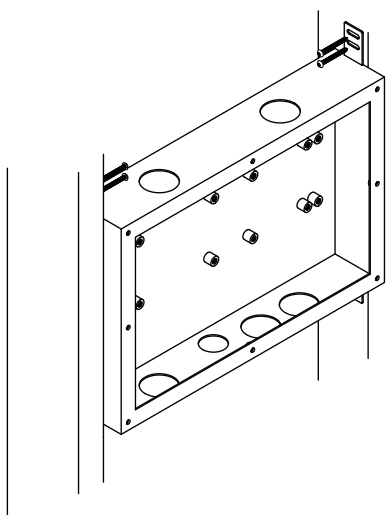

STEP 6 Install the built-in products on the thread bolts inside the box. Please refer to the detail installation manual for different built-in products. Here take QS3300 as an example for illustration.

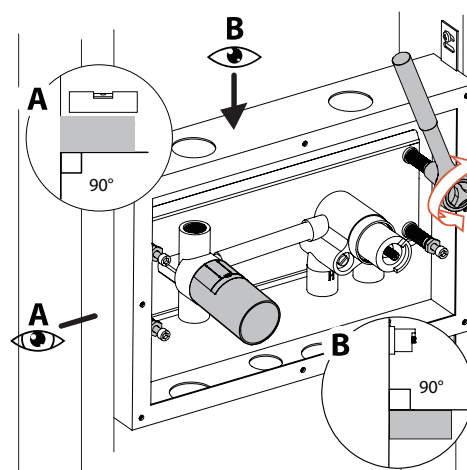


Installation note

built-in box


QTOO

part of dline


- STEP 7** Make sure the built-in product is fixed securely in place inside the box. Remove the plastic cover and keep them for next steps.

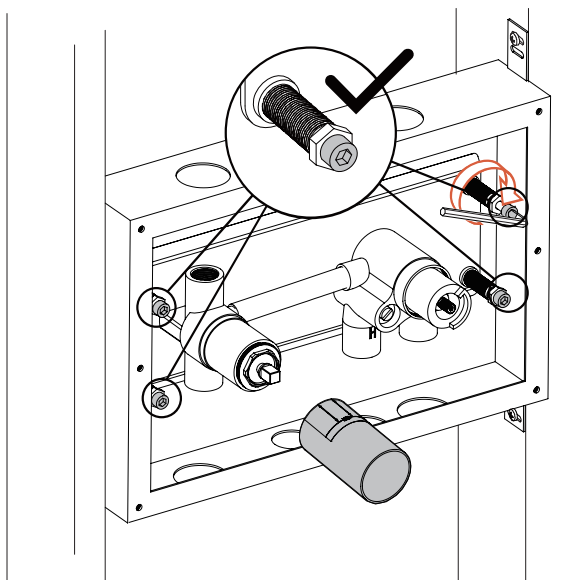


- STEP 8** Install sealing cover for hoses (B) onto the punched holes where the inlet or outlet pipe will go through. The sealing cover for drain pipe (C) Must be installed according to below image. All the punched holes without inlet or outlet pipe Must be covered by sealing plug (D).

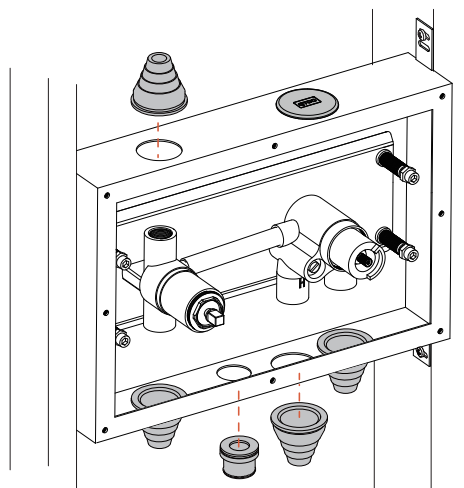

- STEP 9** Connect each pipe connection towards the mixer in accordance with the mixer manual. Test the connection under pressure and inspect for leakage.

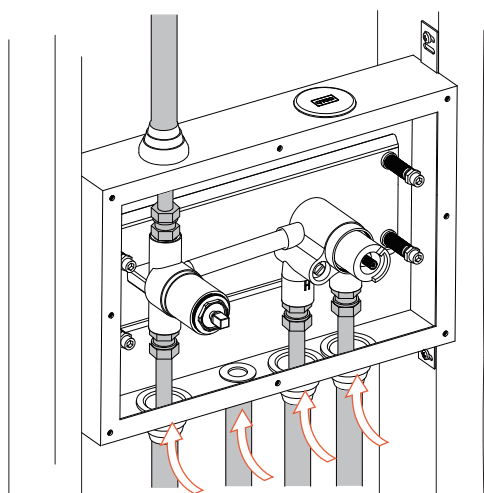

- STEP 10** Install the drainage pipe in accordance with local water safety regulations.

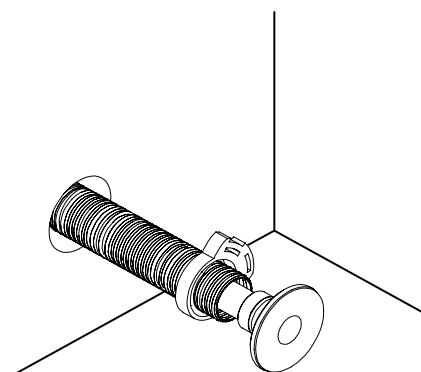


Installation note

built-in box


QTOO

part of dline


- STEP 11** Make sure the foam is installed properly in between the built-in box and cover lid.

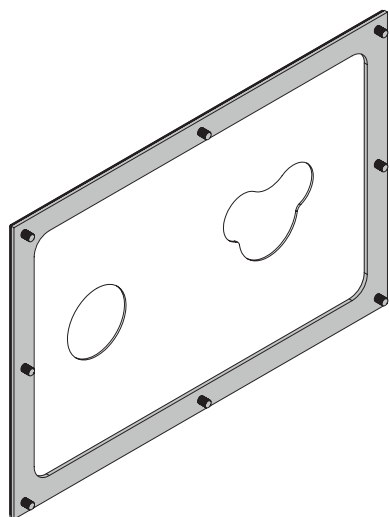


- STEP 12** Install the included cover lid with the included mounting screws.

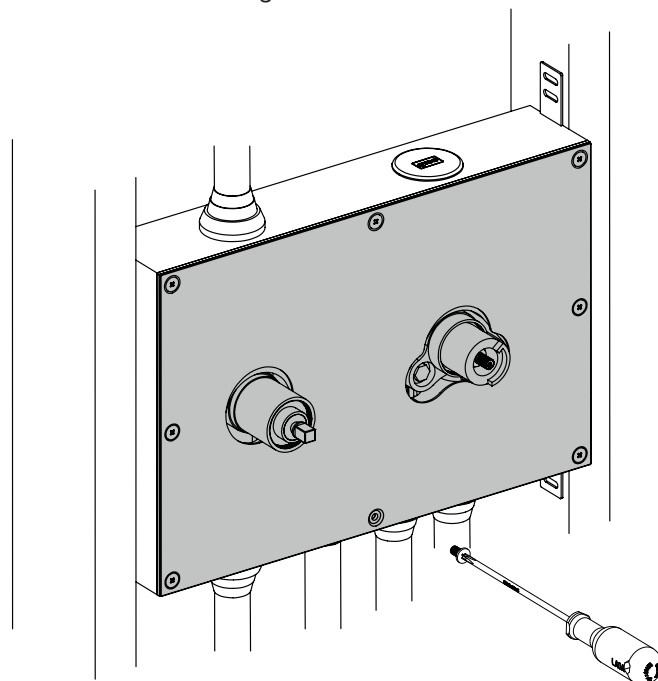

- STEP 13** Put on the EPDM sealing cover sheet and the plastic cover to protect the cartridge.

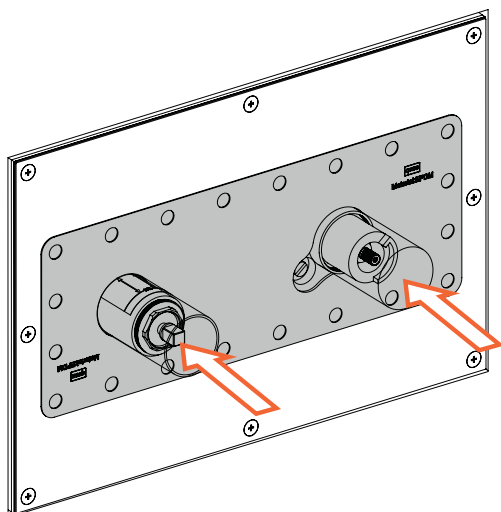



- STEP 14** Paint on the wall.
Refer to the mixer manual regarding installation of mixer components that portrude out from the cover lid.

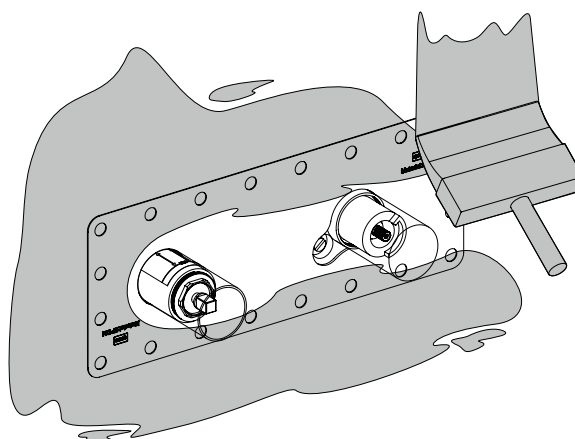

Installation note

built-in box

Service and maintenance

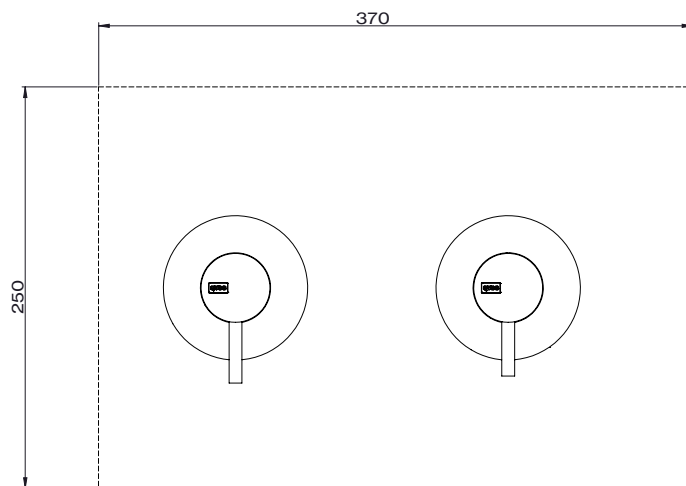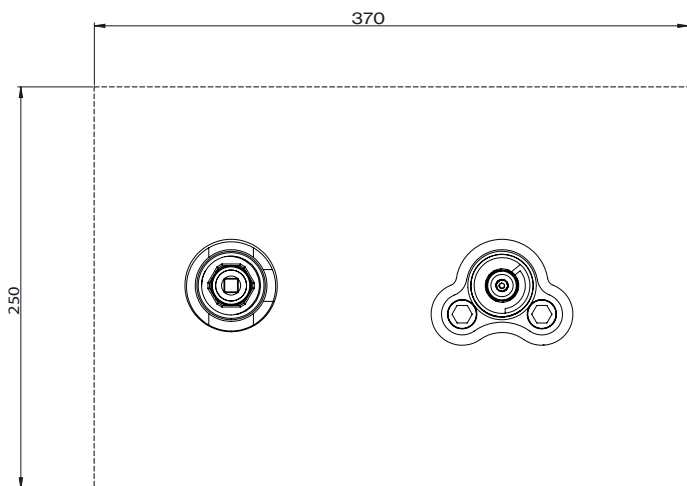

For maintenance of the connections towards the mixer, follow the instructions of the waterproofing manufacturer to remove tiling, and accessing the mixer by removing the cover lid of the box. The dimensions of the cover lid are 370 x 250 mm.

For service and maintenance of the built-in products, refer to the built-in parts manual.

Contact

d line

Jyllingevej 59, kld. 2720 Copenhagen Denmark

T: +45 72 17 01 38

E: service@dline.com